


### INSULATED FIBERGLASS ENCLOSURE SIZING GRID

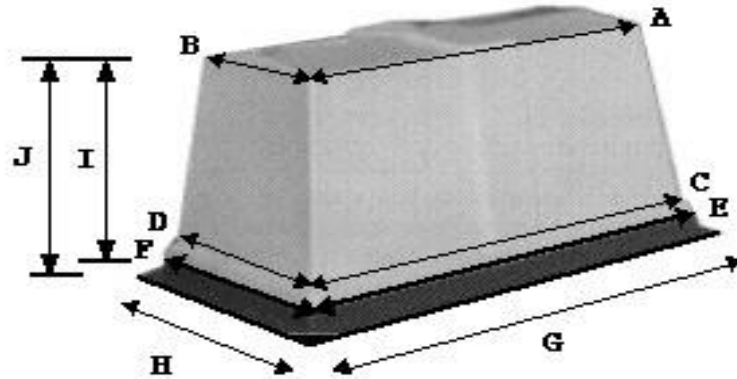

	OUTSIDE TOP	LOWER COVER	BOTTOM AT UPPER BASE	OUSIDE BASE FLANGE	COVER HEIGHT	OVERALL HEIGHT
MODEL #	A—B	C—D	E—F	G—H	I	J
D-103	20.75 x 6.00	27.25 x 12.25	30.25 x 14.75	33.75 x 18.25	21.5	23.25
D-104	31.75 x 5.75	38.25 x 12.25	41.25 x 15	44.25 x 18	20.75	23.5
D-102	22.25 x 15.75	26.5 x 20	29 x 22.25	33 x 26.25	25.75	28.5
D-102-39	22.25 x 15.75	25.75 x 19.25	31 x 25	34 x 27.75	25.75	39
D-105	41.25 x 17.50	47 x 22.75	49 x 25	53.5 x 29.5	23.5	25.5
D-105-36	41.25 x 17.50	47 x 22.75	52 x 28	55 x 31	23.5	36
D-100	30 x 20.75	41.5 x 32.5	44 x 35	48.5 x 39.75	34.75	37
D-106	39 x 31.25	49 x 40.5	50.75 x 42.5	54.75 x 46.5	40	43.5
D-207	48.75 x 32	55.5 x 37.5	59.5 x 40.5	65 x 46	35.5	37.25
D-207-48	48.75 x 32	55.5 x 37.5	63 x 44	65.5 x 47	35.5	48
D-108	64.5 x 31.5	68.5 x 34.5	70.5 x 36.5	74.5 x 40.5	44.25	46.25
D-301	74.63 x 46.5	82.5 x 54.5	86.5 x 59	90.5 x 63	26.75	33.75
D-303	74.63 x 46.5	82.5 x 54.5	86.5 x 59	90.5 x 63	46	53

### GENERAL SPECIFICATIONS

The molded fiberglass enclosure shall be constructed with rigid thixotropic polyester resin and 30% chopped glass in 1-1/2 to 2-inch random patterns of 1/8 to 3/16 inch thick. The exterior finish shall be White isophthalic gel-coating .02 to .04 inches. The inside surface shall be insulated with 2 lb.-density sprayed-on polyurethane foam, producing an R-14 to R-19 composite value. The fiberglass base flange shall be hinged using 3-1/2-inch noncorrosive polycross link hinges or 3 x 4-inch stainless steel. A 30 lb. spring-loaded latch hooks to a 7-inch cast aluminum handle.